

FLOAT AIR VENTS



2161C

FLOATVENT.

Automatic vertical air vent valve. Sealed with O-ring. Designed for installation on head connections of flush manifolds. Brass CW617N body. Max. pressure: 10 bar. Max. temperature: 110°C

Type	Part no. WII	Part no. WID	Size
2161C	2161C38	10004145	3/8"
2161C	2161C12	10026035	1/2"
2161C	2161C34	10004953	3/4"
2161C	2161C1	10026034	1"



2311C

CHECKVENT.

Sealed check valve for automatic vertical air vent valve 2161C38.

Type	Part no. WII	Part no. WID	Size
2311C	2311C38	-	3/8"




MXV

MAXIVENT.

Automatic high capacity deaerator provided with manual air vent valve. Cast iron body and cover with epoxy finish. Max. operating pressure : 12 bar. Max. operating temperature : 115° C. Female air outlet connection : 3/8".

Type	Part no. WII	Part no. WID	Size
MXV	0253020	-	3/4"
MXV	0253025	10025852	1"
MXV	0253032	-	1.1/4"

Air discharge rate - Operating pressure

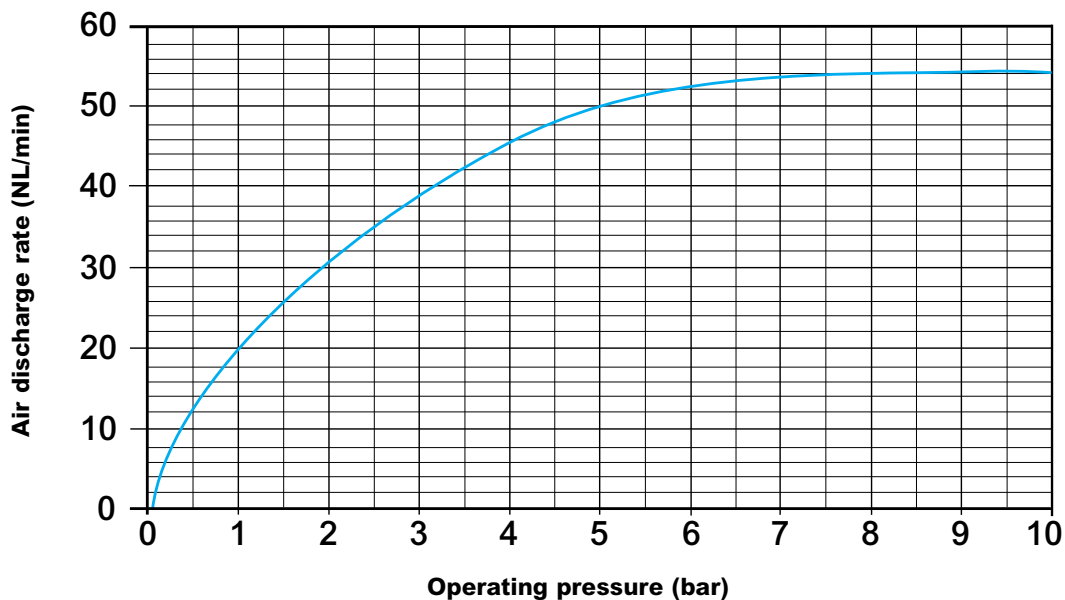

AUTOMATIC, MANUAL AND WITH ADJUSTABLE DISCHARGE AIR VENT VALVES



MV

MINIVENT

Automatic air vent valve with unscrewable cover for inspection.
 Body and cover of brass CW617N. Corrosion-resistant polyethylene float.
 Max. pressure : 12 bar. Max. temperature : 115° C.
 Also suitable for water containing additive (glycol up to 30%)

Type	Part no. WII	Part no. WID	Size
MV	0250008	10004916	1/4"
MV	0250010	10004917	3/8"
MV	0250215	10004919	1/2"



MVR

MINIVENT

Automatic air vent valve like MVD but complete with automatic shut-off valve RIA.

Type	Part no. WII	Part no. WID	Size
MVR	0250110	10004932	3/8"
MVR	0250115	10004937	1/2"

Air discharge rate - Operating pressure

